

## Firmware update – testo 175 and testo 176

Make sure that you don't need any data on the logger anymore. Then put the logger in RST mode by removing batteries and putting them back. Please connect the datalogger via USB to the computer. Then start the firmware update tool "Logger175176 FW upgrade v2.0.exe" by double-clicking it.

### Compatibility with firmware update tool



Please be aware that only loggers with the following firmware version can be flashed with the help of the firmware update tool:

Datalogger	Firmware version
<b>testo 175 T1</b>	v. 1.93 or higher
<b>testo 175 T2</b>	v. 1.93 or higher
<b>testo 175 T3</b>	v. 1.91 or higher
<b>testo 175 H1</b>	v. 2.21 or higher
<b>testo 176 T1</b>	v. 1.5 or higher
<b>testo 176 T2</b>	v. 1.5 or higher
<b>testo 176 T3</b>	v. 1.3 or higher
<b>testo 176 T4</b>	v. 1.3 or higher
<b>testo 176 H1</b>	v. 1.90 or higher
<b>testo 176 H2</b>	v. 1.90 or higher
<b>testo 176 P1</b>	v. 1.90 or higher


(Data loggers with a lower firmware version cannot be updated)

## Update instructions



1. Scan logger device (Please connect only one device once)

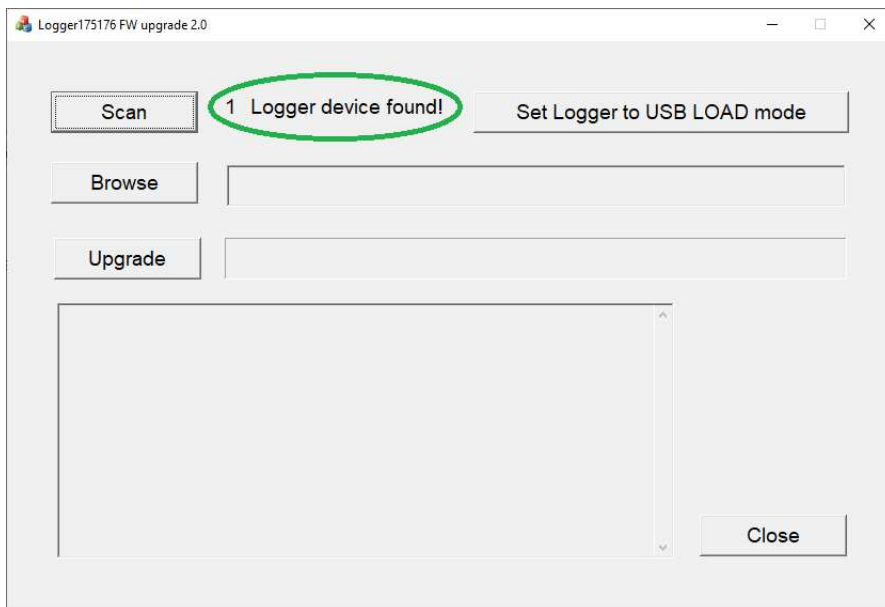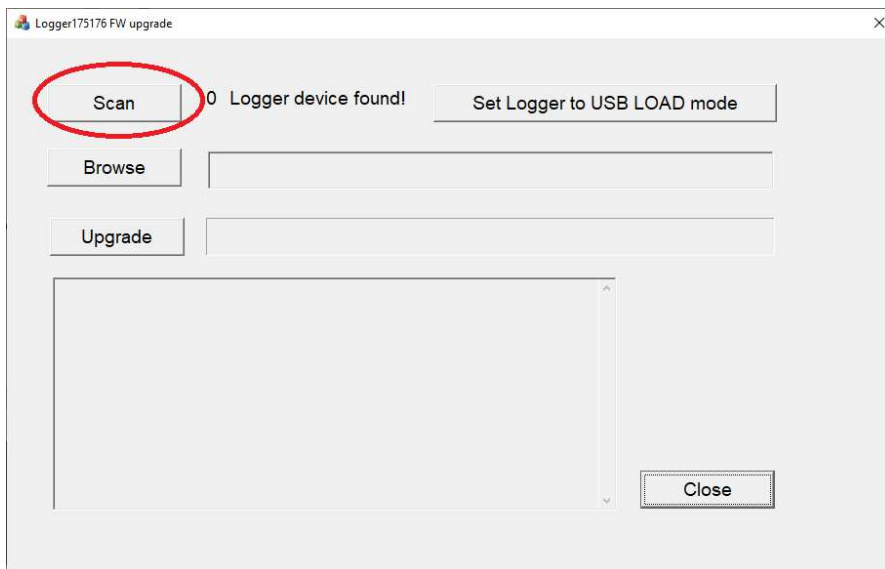

2. [Set USB LOAD mode], Check the LCD display for "USB LOAD", if OK, click [YES]

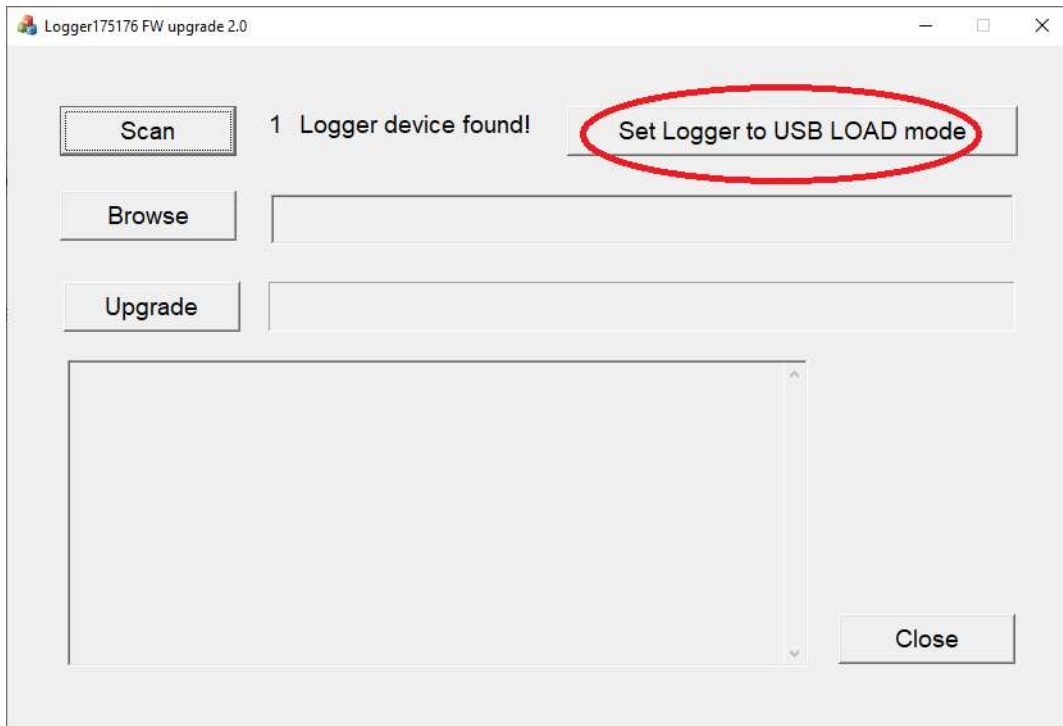

3. Click [Browse] button to select the correct firmware file.

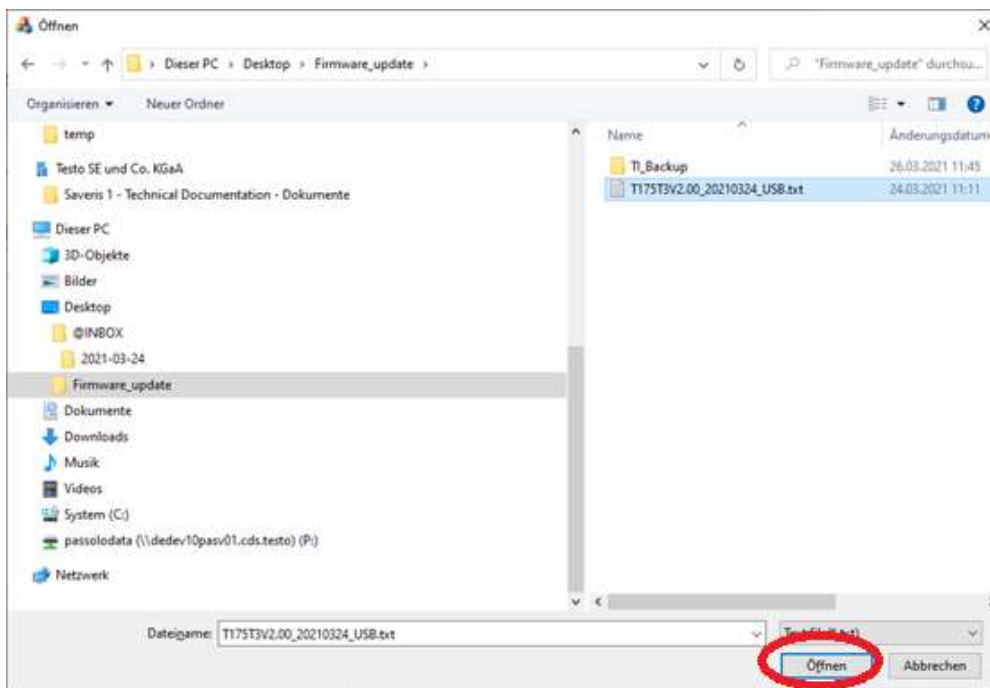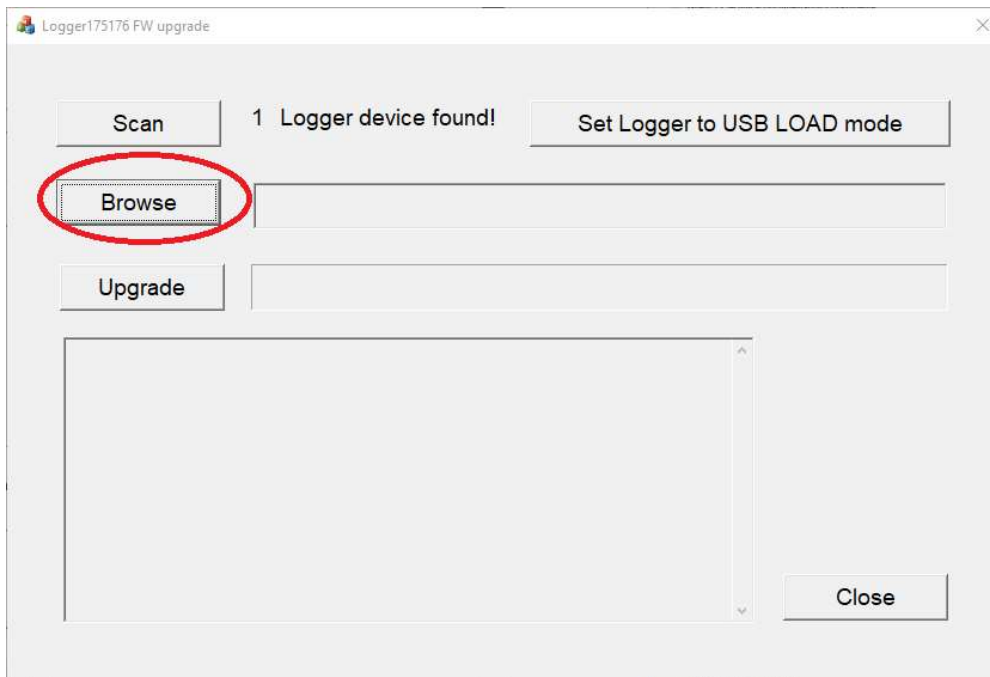

4. Click [Upgrade] button to upgrade the firmware.

